



TL-D consumer products



TL-D 30W/827 1PP/10

The lamp can be operated in existing TL-D luminaire and is available in a wide range of wattages and colors.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Color Designation	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		Incandescent White
Life To 10% Failures (Nom)	12000 h	Chromaticity Coordinate X (Nom)	0.463
Life to 50% Failures (Nom)	15000 h	Chromaticity Coordinate Y (Nom)	0.42
Life to 50% Failures Preheat (Nom)	20000 h	Correlated Color Temperature (Nom)	2700 K
LSF 2000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	80 lm/W
LSF 4000 h Rated	97 %	Color Rendering Index (Nom)	82
LSF 6000 h Rated	96 %	LLMF 2000 h Rated	96 %
LSF 8000 h Rated	95 %	LLMF 4000 h Rated	95 %
LSF 12000 h Rated	89 %	LLMF 6000 h Rated	94 %
LSF 16000 h Rated	33 %	LLMF 8000 h Rated	93 %
LSF 20000 h Rated	2 %	LLMF 12000 h Rated	92 %
Flux measurement reference	Sphere	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Color Code	827 [CCT of 2700K]	Power (Nom)	30.2 W
Luminous Flux (Nom)	2400 lm	Lamp Current (Nom)	0.360 A
Luminous Flux (Rated) (Nom)	2400 lm		

TL-D consumer products

Temperature	
Design Temperature (Nom)	25 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Shape	T8 [26 mm (T8)]
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	31 kWh

EPREL Registration Number	423369
Product data	
Full product code	871150062264825
Order product name	TL-D 30W/827 1PP/10
EAN/UPC - Product	8711500622648
Order code	927920582719
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927920582719
Net Weight (Piece)	134.900 g
ILCOS Code	FD-30/27/1B-E-G13


Dimensional drawing

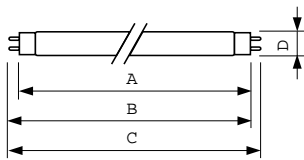


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/827 1PP/10	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

TL-D 30W/827 1PP/10

Photometric data

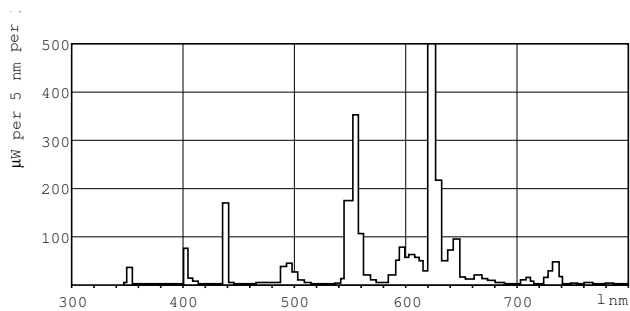



LDPB_TL-D8_827-Spectral power distribution B/W

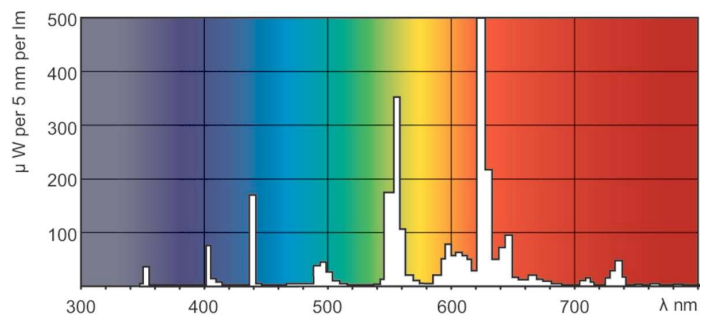

LDPO_TL-D8_827-Spectral power distribution Colour


TL-D consumer products

Lifetime

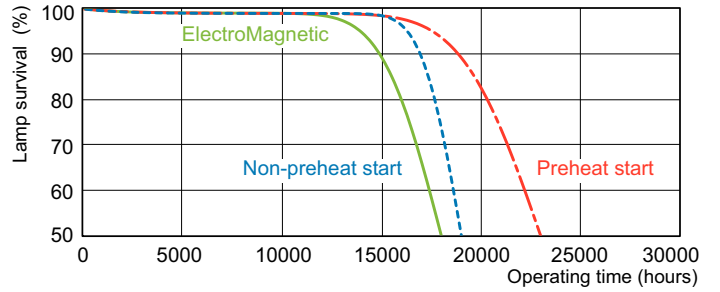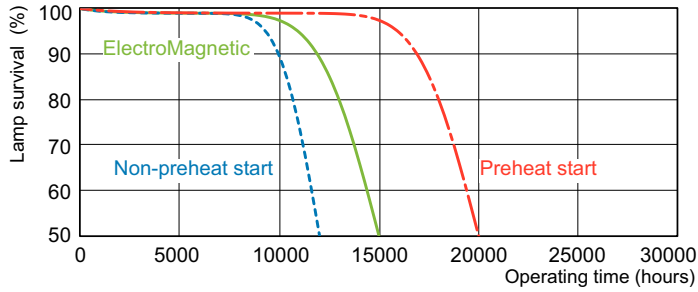

LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram

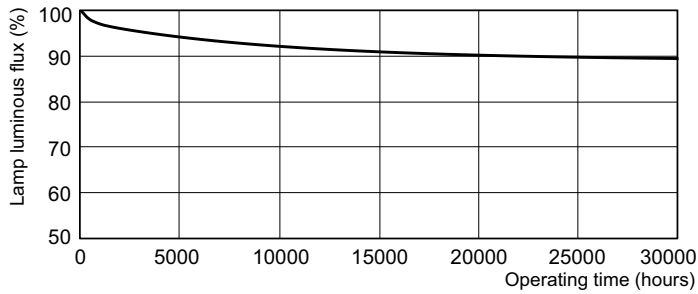

LDLM_TL-D8_0001-Lumen maintenance diagram

